



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

*Bureau canadien
des brevets
Certification*

*Canadian Patent
Office
Certification*

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
CA 2341965, on March 23, 2001, by **ADVANCED NUMERICAL METHODS LTD.**,
assignee of Mark H.A. Tigges, for "A Method and System for Inversion of
Detail-In-Context Data Presentations".

CERTIFIED COPY OF
PRIORITY DOCUMENT

Gracy Paulsen
Agent certificateur/Certifying Officer

December 1, 2006

Date

Canada

(CIPO 68)
31-03-04

OPIC



CIPO

ABSTRACT

In a data processing system that executes a program of instructions, a method of inverting a distorted surface in a detail-in-context presentation is provided comprising the steps of locating a first approximation point in an undistorted surface for the inversion of a point in a distorted surface, determining if the approximation point is acceptable as an inversion of the point in the distorted surface, locating a next approximation point in the undistorted surface if the first approximation point is not acceptable, and repeating this process until an acceptable approximation point is located for the inversion of the point in the distorted surface. The use of this method to obtain the distance between points on an undistorted surface from the relative distances between corresponding points on a plurality of distorted surfaces in a detail-in-context presentation is provided. A data processing system for the inversion of detail-in-context presentations is provided including an input device, a central processing unit, memory, and a display wherein said data processing system has stored therein data representing sequences of instructions which when executed cause the method described to be performed.

A METHOD AND SYSTEM FOR INVERSION OF DETAIL-IN-CONTEXT PRESENTATIONS

The invention relates to the field of computer graphics processing. More specifically, the invention relates to detail-in-context presentations and the inversion of distortions in
5 detail-in-context presentations.

BACKGROUND OF THE INVENTION

Since the advent of video display terminals as the primary interface to the computer, making the best use of the available screen space has been a fundamental issue in user
10 interface design. This issue has been referred to as the "screen real estate problem". The necessity for effective solutions to this problem is growing as the ability to produce and store visual information in great volumes is outstripping the rate at which display technology is advancing. One solution to the screen real estate problem is the use of detail-in-context presentation techniques. Detail-in-context presentations are useful for
15 displaying large amounts of information on limited-size computer screens.

Now, in the detail-in-context discourse, differentiation is often made between the terms "representation" and "presentation". A representation is a formal system, or mapping, for specifying raw information or data that is stored in a computer or data processing system. For example, a digital map of a city is a representation of raw data including street names
20 and the relative geographic location of streets and utilities. Such a representation may be displayed visually on computer screen or printed on paper. On the other hand, a

presentation is a spatial organization of a given representation that is appropriate for the task at hand. Thus, a presentation of a representation organizes such things as the point of view and the relative emphasis of different parts or regions of the representation. For example, a digital map of a city may be presented with a work route magnified to reveal street names. Thus, detail-in-context presentations allow for magnification of a particular region of interest (the "focal region") in a representation while preserving visibility of the surrounding representation. In other words, in detail-in-context presentations focal regions are presented with an increased level of detail without the removal of contextual information from the original representation. In general, a detail-in-context presentation may be considered as a distorted view (or distortion) of a portion of the original representation where the distortion is the result of the application of a "lens" like distortion function to the original representation. For reference, a detailed review of various detail-in-context presentation techniques may be found in Carpendale's *A Framework for Elastic Presentation Space* (Carpendale, Marianne S. T., *A Framework for Elastic Presentation Space* (Burnaby, British Columbia: Simon Fraser University, 1999)).

One shortcoming of the prior art detail-in-context presentation methods is their inability to effectively invert distortions in a detail-in-context presentation back to an original or undistorted presentation of the representation. The ability to perform such an inversion or inverse mapping would be of great value in extending the capabilities of detail-in-context presentations to applications such as image editing. For example, the editing of a focal region in a representation may be facilitated more easily in a distorted presentation rather than in an undistorted presentation.

The ability to perform an inverse mapping is also necessary for applications involving the subsequent distortion of a previously distorted presentation. In other words, inversion would allow a presentation system user to accurately position or reposition one or more distortion producing "lenses" within a given presentation that has already been distorted.

- 5 Hence, the distorted presentation ultimately viewed by the user may be the end result of a series of distortion steps wherein the individual distortion steps are not known or are difficult to invert. In fact, the need for inversion arises whenever it is necessary to position a lens based on observed coordinates in the distorted presentation. This is so because the lens may be directly generated only from coordinate information in the
- 10 undistorted presentation. As such, an inversion is necessary to produce the source coordinates for generating the lens.

- Moreover, inversion provides a means to calculate real distances in an undistorted presentation based on locations within one or more lenses in a corresponding distorted presentation. For example, if a user wants to know the distance in the undistorted
- 15 presentation between the focal points of two separate lenses in a corresponding distorted presentation of a map, such as the distance between a current location and a destination location, this distance can be computed via inversions of the focal points of these lenses.

- Several systems are known which provide techniques for converting distorted or warped three-dimensional (3D) images into corrected, undistorted, or dewarped two-dimensional
- 20 (2D) images. In United States Patent Number 6,005,611 (Gullichsen, et al.), a system is disclosed wherein a distorted image captured by a wide-angle or fisheye lens is corrected through the use of a specially generated polynomial transform function that maps points from the distorted image into rectangular points. A more complex transform function is

described in United States Patent Number 5,185,667 (Zimmerman). In United States Patent Number 5,329,310 (Liljegern, et al.) a similar objective is achieved in the context of motion picture images through the use of multiple lens (camera and projector) transfer functions. The result being the ability to project an image, taken from a particular point of view, onto a screen, especially a curved wide angle screen, from a different point of view, to be viewed from the original point of view, without distortion. In United States Patent Number 5,175,808 (Sayre), a method and apparatus for non-affine image warping is disclosed that uses displacement tables to represent the movement of each pixel from an original location in a source image to a new location in a warped destination image.

Through these displacement tables and a resampling method, the need for inversion of the underlying transform equation that specify the distortion or warp is eliminated. Finally, in United States Patent Number 4,985,849 (Hideaki), look-up tables are used in combination with the forward evaluation of the transform equation in order to avoid the step of transform equation inversion. However, none of these systems disclose a method and system for inverting distortions in a manner that is optimized for detail-in-context presentations.

A need therefore exists for a method and system that will allow for the effective inversion of distortions in detail-in-context presentations. Therefore, it is an object of the present invention to obviate or mitigate at least some of the above mentioned disadvantages.

SUMMARY OF THE INVENTION

The invention provides a method and system for the inversion of distortions in detail-in-context presentations. According to one aspect of the invention, a method is provided that allows a distortion in a detail-in-context presentation to be inverted. The method
5 comprises the steps of locating a first approximation point in an undistorted surface for the inversion of a point in a distorted surface, determining if the approximation point is acceptable as an inversion of the point in the distorted surface, locating a next approximation point in the undistorted surface if the first approximation point is not acceptable, and repeating this process until an acceptable approximation point is located
10 for the inversion of the point in the distorted surface. According to another aspect of the invention, the use of this method to obtain the distance between points on an undistorted surface from the relative distances between corresponding points on a plurality of distorted surfaces in a detail-in-context presentation is provided. According to another aspect of the invention, a data processing system is provided. This data processing system
15 has stored therein data representing sequences of instructions which when executed cause the above-described method to be performed. The data processing system generally has an input device, a central processing unit, memory, and a display.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The invention may best be understood by referring to the following description and accompanying drawings which illustrate the invention. In the drawings:

FIG. 1 is a cross-sectional view of a presentation illustrating a point X on a distorted surface and a first approximation point P_0 for its inversion back to an original basal plane in accordance with the preferred embodiment;

FIG. 2 is a cross-sectional view of a presentation illustrating the displacement of a first approximation point P_0 onto a distorted surface by application of a distortion function D resulting in a point P_0^D in accordance with the preferred embodiment;

FIG. 3 is a cross-sectional view of a presentation illustrating the projection of a point P_0^D onto a line RVP-X resulting in a point P_0^P in accordance with the preferred embodiment;

FIG. 4 is a cross-sectional view of a presentation illustrating the projection of a point P_0^P onto a basal plane resulting in a second approximation point P_1 and a corresponding displaced point P_1^D in accordance with the preferred embodiment;

FIG. 5 is a cross-sectional view of a presentation illustrating the projection of a point P_1^D onto a line RVP-X resulting in a point P_1^P which is then projected onto a basal plane resulting in a third approximation point P_2 in accordance with the preferred embodiment;

FIG. 6 is a block diagram of a data processing system in accordance with the preferred embodiment;

FIG. 7 is a flow chart illustrating an iterative method for inversion in accordance with the preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following description, numerous specific details are set forth to provide a thorough understanding of the invention. However, it is understood that the invention may be practiced without these specific details. In other instances, well-known software, circuits, structures and techniques have not been described or shown in detail in order not to obscure the invention. The term data processing system is used herein to refer to any machine for processing data, including the computer systems and network arrangements described herein. The term "Elastic Presentation Space" or "EPS" is used herein to refer to techniques that allow for the adjustment of a visual presentation without interfering with the information content of the representation. The adjective "elastic" is included in the term as it implies the capability of stretching and deformation and subsequent return to an original shape. EPS graphics technology is described by Carpendale in *A Framework for Elastic Presentation Space* (Carpendale, Marianne S. T., *A Framework for Elastic Presentation Space* (Burnaby, British Columbia: Simon Fraser University, 1999)) which is incorporated herein by reference. Basically, in EPS graphics technology, a two-dimensional visual representation is placed onto a surface; this surface is placed in three-dimensional space; the surface, containing the representation, is viewed through perspective projection; and the surface is manipulated to effect the reorganization of image details. The presentation transformation is separated into two steps: surface manipulation or distortion and perspective projection.

In general, the invention described herein provides a method and system for the inversion of distortions in detail-in-context presentations. The method and system described is applicable to detail-in-context navigation within computer graphics processing systems

including EPS graphics technology and to computer graphics processing systems in general.

According to one aspect of the invention, a method is described that allows a distortion in a detail-in-context presentation to be inverted. The method comprises the steps of

5 locating a first approximation point in an undistorted surface for the inversion of a point in a distorted surface, determining if the approximation point is acceptable as an inversion of the point in the distorted surface, locating a next approximation point in the undistorted surface if the first approximation point is not acceptable, and repeating this process until an acceptable approximation point is located for the inversion of the point in

10 the distorted surface.

According to another aspect of the invention, the use of this method to obtain the distance between points on an undistorted surface from the relative distances between corresponding points on a plurality of distorted surfaces in a detail-in-context presentation is described.

15 According to another aspect of the invention, a data processing system is described. This data processing system has stored therein data representing sequences of instructions which when executed cause the above-described method to be performed. The data processing system generally has an input device, a central processing unit, memory device, and a display.

20 Referring to FIG. 6, there is shown a block diagram of an exemplary data processing system 600 according to one embodiment of the invention. The data processing system is suitable for implementing EPS graphics technology. The data processing system 600

includes an input device 610, a central processing unit or CPU 620, memory 630, and a display 640. The input device 610 may be a keyboard, mouse, trackball, or similar device. The CPU 620 may include dedicated coprocessors and memory devices. The memory 630 may include RAM, ROM, databases, or disk devices. And, the display 640
5 may include a computer screen or terminal device. The data processing system 600 has stored therein data representing sequences of instructions which when executed cause the method described herein to be performed. Of course, the data processing system 600 may contain additional software and hardware a description of which is not necessary for understanding the invention.

10 Referring to FIGURES 1 through 7 the method of one embodiment of the invention will now be described. With this method, a point in an undistorted presentation or data space is found, which when distorted, yields a specified point in a distorted presentation or data space. Then, if desired, the inversion of the entire distorted presentation or data space to an original undistorted presentation or data space may be obtained as the inverse mapping
15 of the locus of points in the distorted presentation or data space. The method is iterative and makes use of the distortion process itself as a component in an approximation technique for computing the inverse of the distortion.

Referring to FIG. 1, there is shown a cross-sectional view of a presentation 100 in accordance with EPS graphics technology and in accordance with the preferred
20 embodiment. EPS graphics technology employs viewer-aligned perspective projections to produce detail-in-context presentations in a reference view plane 101 which may be viewed on a display 640. Undistorted two-dimensional (2D) data points are located in a basal plane 110 of a three-dimensional (3D) perspective viewing volume 120 which is

defined by extreme rays 121 and 122 and the basal plane 110. A reference viewpoint (RVP) 140 is located above the centre point of the basal plane 110 and reference view plane 101. Points in the basal plane 110 are displaced upward onto a distorted surface 130 which is defined by a general three-dimensional distortion function D. The direction of
 5 the viewer-aligned perspective projection corresponding to the distorted surface 130 is indicated by the line $F_o - F$ 131 drawn from a point F_o 132 in the basal plane 110 through the point F 133 which corresponds to the focus or focal region of the distorted surface 130. The method of the present invention locates a point P_i in the basal plane 110 that corresponds to a point X 150 on the distorted surface 130 through a series of steps,
 10 involving iteration and approximation, as follows. Successive approximations of the point P_i are represented by the subscript i where $i \geq 0$.

Referring to FIG. 7, where there is shown a flow chart 700 illustrating the method of one embodiment of the invention, and again referring to FIG. 1, at step 1, an acceptable tolerance δ is selected for the magnitude of the difference between the point X 150 on the
 15 distorted surface 130 and the point P_i^D , where P_i^D represents the result of the mapping of a point P_i in the basal plane 110 onto the distorted surface 130 through the function D. The value of δ is application dependent. For example, an acceptable δ could be less than half the width of a pixel for a typical display surface such as a monitor 640. In general, successive approximations of the point P_i will continue until the magnitude of the
 20 difference between the point X 150 and the point P_i^D is less than δ , that is, until $|P_i^D - X| < \delta$.

At step 2, a first approximation point P_0 160 for the inversion of X 150 is located at the intersection point in the basal plane 110 of a line RVP-X 170 drawn through RVP 140, X 150, and the basal plane 110. Here, $i = 0$.

Referring to FIG. 2, at step 3, point P_0 160 is displaced onto the distorted surface 130 by the application of D. The resultant point on the distorted surface 130 is represented by P_0^D 210.

At step 4, the magnitude of the difference between the point X 150 and the point P_0^D 210 is calculated. If $|P_0^D - X| < \delta$, then an acceptable value for the inversion of the point X 150 will have been found and the method is complete for the point X 150. The method may then proceed with the inversion of another point on the distorted surface 130. If $|P_0^D - X| > \delta$, then the method will continue and will generate a next approximation for the inversion of the point X 150.

Referring to FIG. 3, at step 5, the point P_0^D 210 is projected onto the line RVP-X 170 to locate the point P_0^P 310 which is the closest point to P_0^D 210 on the line RVP-X 170.

Referring to FIG. 4, at step 6, the point P_0^P 310 is projected onto the basal plane 110 to produce the next approximation P_1 410 for the inversion of the point X 150. This projection is made in the direction parallel to a line $F - F_0$, that is, in the direction from point F 133 to point F_0 132 parallel to the line $F_0 - F$ 131. Alternately, this direction can also be established by applying the distortion function D to any point in the basal plane within the lens extent (as defined by the distortion function D). The direction of the displacement of such a point by the distortion function D will be antiparallel to the line $F - F_0$. The point P_1 410 is thus located on the basal plane 110 at the point of intersection

of the basal plane 110 and a line 420 drawn parallel to the line $F_o - F$ 131 and passing through the point P_o^P 310. Now, $i = 1$ and a second iteration may begin from step 3.

Referring to FIG. 5, a second iteration is illustrated resulting in point P_2 510 as an approximation of the inversion of the point X 150.

- 5 Again referring to FIG. 1, in certain cases such as folding, which is the lateral displacement of a focal region 133 through shearing of the viewer-aligned vector defining the direction of distortion 131, it is possible for successive approximations for P_i to diverge. This may be caused, for example, by a fold in which a undistorted area of the basal plane 110 is hidden by a portion of the distorted surface when viewed from RVP
- 10 140 such that a line drawn through RVP 140, the distorted surface, and the basal plane 110 intersects the distorted surface at multiple points. In these circumstances, a bisection of approximation points P_i may be used to search for the desired intersection of RVP-X 170 with the basal plane 110.

The method of the embodiment of the invention described above may be used to obtain

15 the distance between points on an undistorted surface from the relative distances between corresponding points on one or more distorted surfaces in a detail-in-context presentation. For example, if one point is selected on a first distorted surface and a second point is selected on a second distorted surface, both surfaces being contained in a detail-in-context presentation, then the distance between these two points on the undistorted

20 surface may be found by first inverting each point on each distorted surface, using the method of the invention, to obtain corresponding points on the undistorted surface. Then,

the required distance may be calculated as the magnitude of the difference between the two inverted points.

To reiterate and expand, the method and system of the present invention includes the following unique features and advantages: it facilitates the location of a point in an undistorted presentation which, when distorted, yields a specified point in a distorted presentation and then, from this point, the inversion of the entire distorted presentation back to the original undistorted presentation may be accomplished through the inverse mapping of the locus of the points in the distorted presentation; it employs an iterative approach to inversion to facilitate general distortion functions; in other words, having knowledge of the location of the point to be inverted in the distorted presentation and through an iterative process, it computes a series of points in the undistorted presentation space until a point is found, which when displaced by a general distortion function, yields a point that is coincident with the point to be inverted in the distorted presentation; it is not specific to a particular distortion function or transform equation; it does not require the maintenance of a copy of the undistorted presentation in computer memory; it does not use look-up tables and hence does not put unacceptable demands on computing system resources, including memory, especially for undistorted presentations that are large in size; and, it may be used to obtain the distance between points in an undistorted presentation from the relative distances between corresponding points on one or more distorted surfaces in a detail-in-context presentation.

Although the invention has been described with reference to certain specific embodiments, various modifications thereof will be apparent to those skilled in the art without departing from the spirit and scope of the invention as outlined in the claims appended hereto.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. In a data processing system that executes a program of instructions, a method of inverting a distorted surface in a detail-in-context presentation comprising the steps of:
 - a) locating a first approximation point P_i for the inversion of a point X;
 - b) determining if said approximation point P_i is acceptable as an inversion of said point X;
 - c) locating a next approximation point P_{i+1} for the inversion of said point X if said approximation point P_i is not acceptable as an inversion of said point X;
 - d) repeating steps (b) and (c) until an acceptable point is located for the inversion of said point X.
2. The method of claim 1 wherein said point X is a point on said distorted surface in said detail-in-context presentation whose inversion is sought.
3. The method of claim 1 wherein said point P_i is a point on said undistorted surface and is the approximate inversion point of said point X.
4. The method of claim 3 wherein said undistorted surface is included in said detail-in-context presentation.


5. The method of claim 1, step (a), and further comprising the step of drawing a line RVP-X from a point RVP above an undistorted surface in said detail-in-context presentation, through said point X, and through said undistorted surface to locate said first approximation point P_i at the point of intersection of said line RVP-X and said undistorted surface.
6. The method of claim 5 wherein said point RVP is a reference viewpoint for said detail-in-context presentation.
7. The method of claim 1, step (b), and further comprising the steps of:
 - a) obtaining a point P_i^D by displacing said point P_i onto said distorted surface by the application of a distortion function D;
 - b) calculating the magnitude of the difference between said point X and said point P_i^D , where said magnitude of the difference is given by $|P_i^D - X|$;
 - c) deciding that an acceptable value of said point P_i for the inversion of said point X has been obtained if said magnitude of the difference is less than a tolerance δ .
8. The method of claim 1, step (c), and further comprising the steps of:
 - a) projecting said point P_i^D onto said line RVP-X to locate a point P_i^P , where said point P_i^P is the closest point to said point P_i^D on said line RVP-X;
 - b) projecting said point P_i^P onto said undistorted surface in a direction opposite to that of the displacement due to the distortion to locate said next approximation point P_{i+1} for the inversion of said point X, where said displacement due to

distortion is given by a line $F_o - F$ drawn through said undistorted surface and the focus F of said distorted surface, and hence where said point P_{i+1} is located on said undistorted surface at the point of intersection of said undistorted surface and a line drawn parallel to said line $F_o - F$ and passing through said point P_i^P .

9. The method of claim 1 and further comprising the step of bisecting said point P_i to counter divergence in successive approximations of said point P_i due to folds or discontinuities in said distorted surface.
10. The method of claim 1 and further comprising the step of repeating steps (a) through (d) for additional or remaining points in said distorted surface.
11. The method of claim 7 and further comprising the step of selecting a value for said tolerance δ .
12. The method of claim 11 wherein said tolerance δ is selected as a fraction of the width of a pixel for a computer display surface.
13. The method of claim 12 wherein said fraction is one half.
14. The method of claim 1 wherein said undistorted surface is a basal plane in accordance with Elastic Presentation Space graphics technology.
15. The method of claim 7 wherein said distortion function D is used to generate said distorted surface.
16. The method of claim 15 wherein said distortion function D is an n -dimensional function, where n is an integer greater than zero.


17. The method of claim 16 wherein said distortion function D is a three-dimensional function.
18. The method of claim 15 wherein said distortion function D is a lens function.
19. The method of claim 1 wherein said detail-in-context presentation is generated in accordance with Elastic Presentation Space graphics technology.
20. The use of the method of claim 1 to obtain the distance between points on said undistorted surface from the relative distances between corresponding points on a plurality of said distorted surfaces in said detail-in-context presentation.
21. A data processing system for the inversion of detail-in-context presentations including an input device, a central processing unit, memory, and a display wherein said data processing system has stored therein data representing sequences of instructions which when executed cause the method and use of claims 1 through 20 to be performed.


FIG. 1

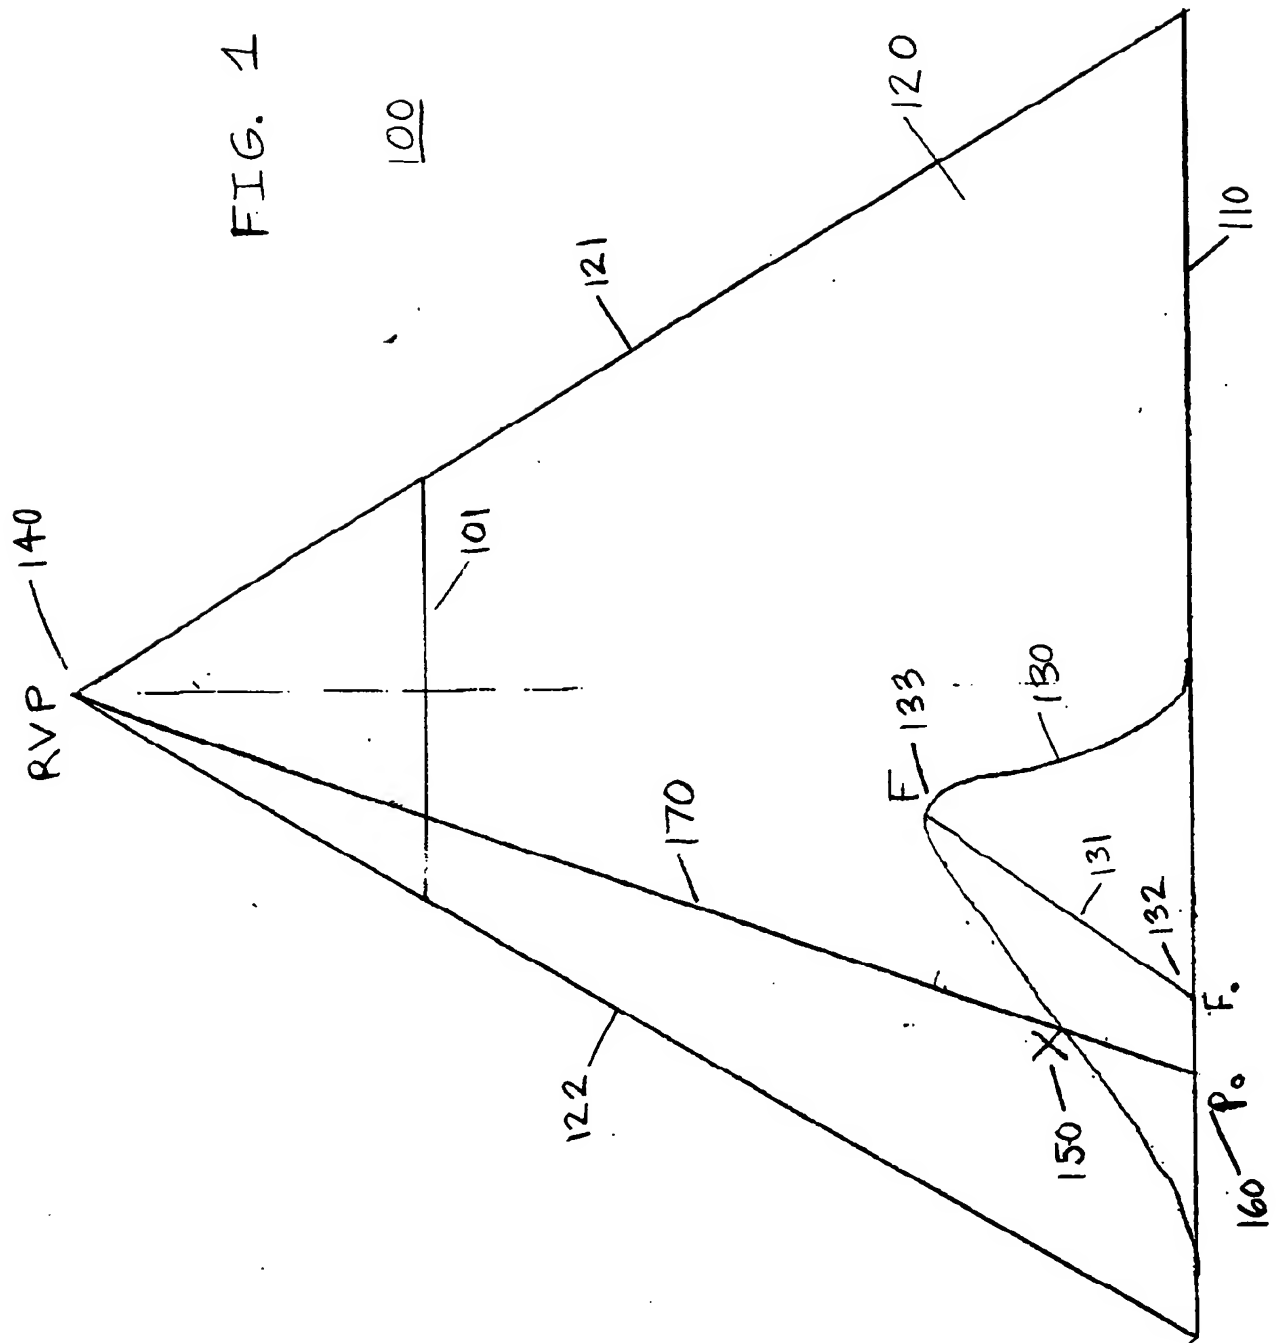


4 H G. 2

200

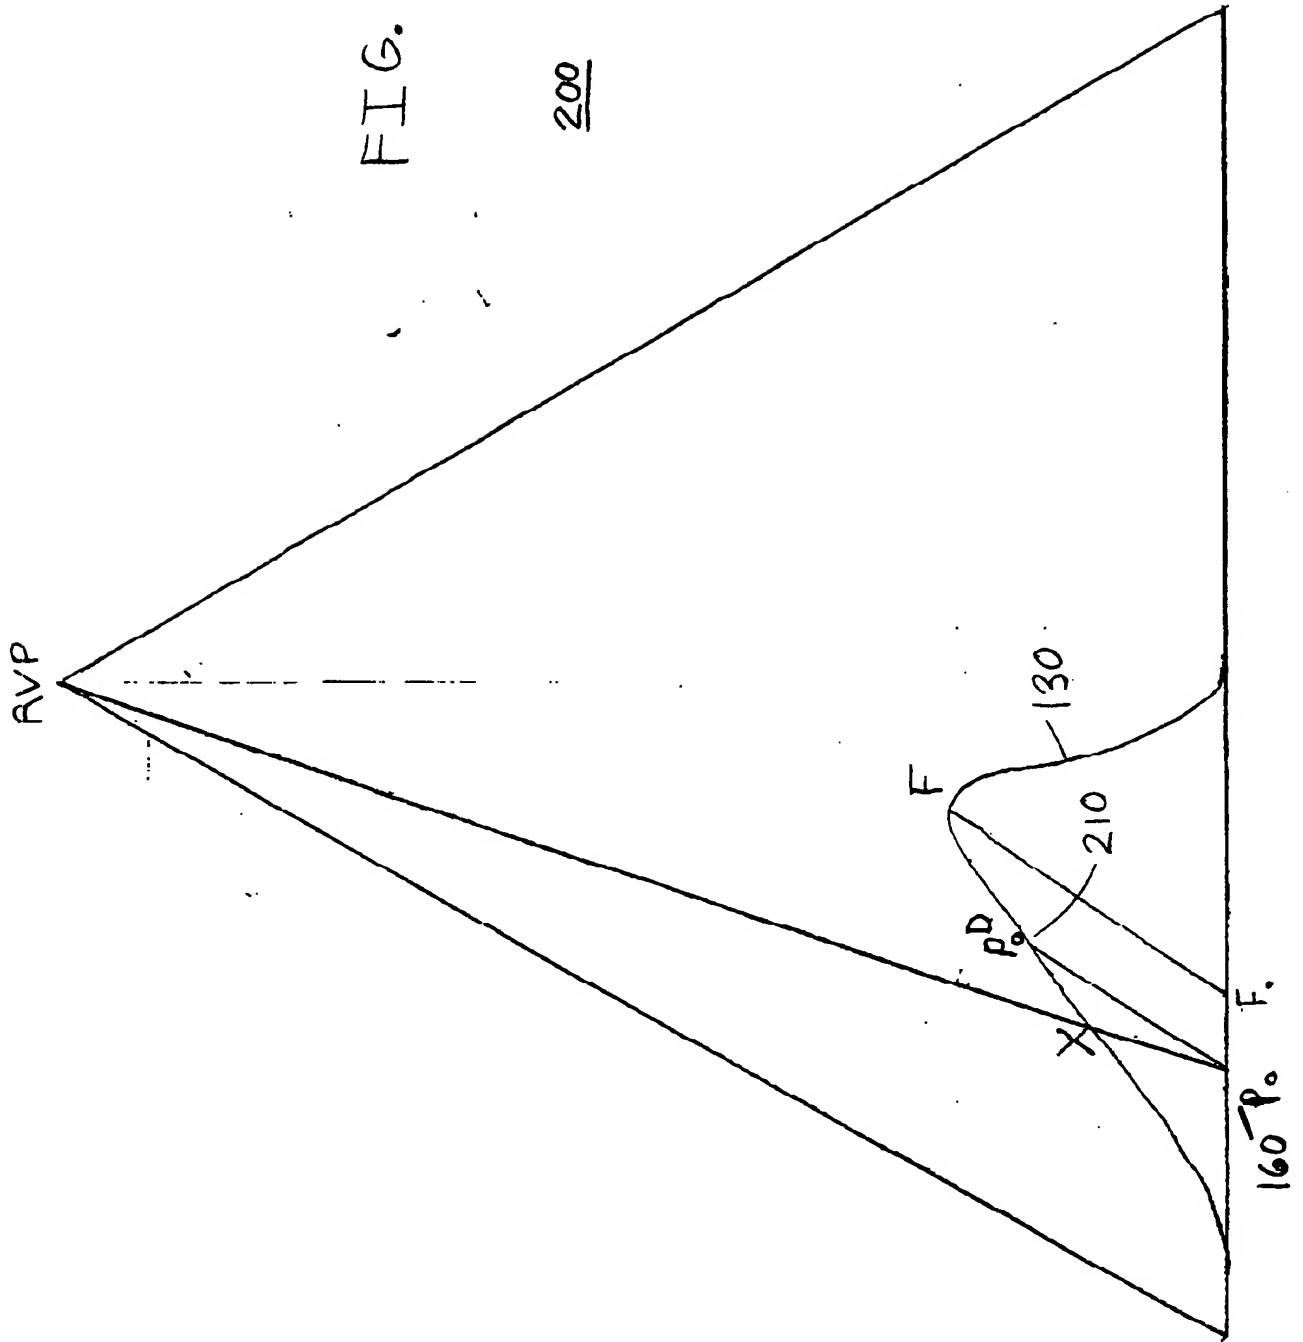

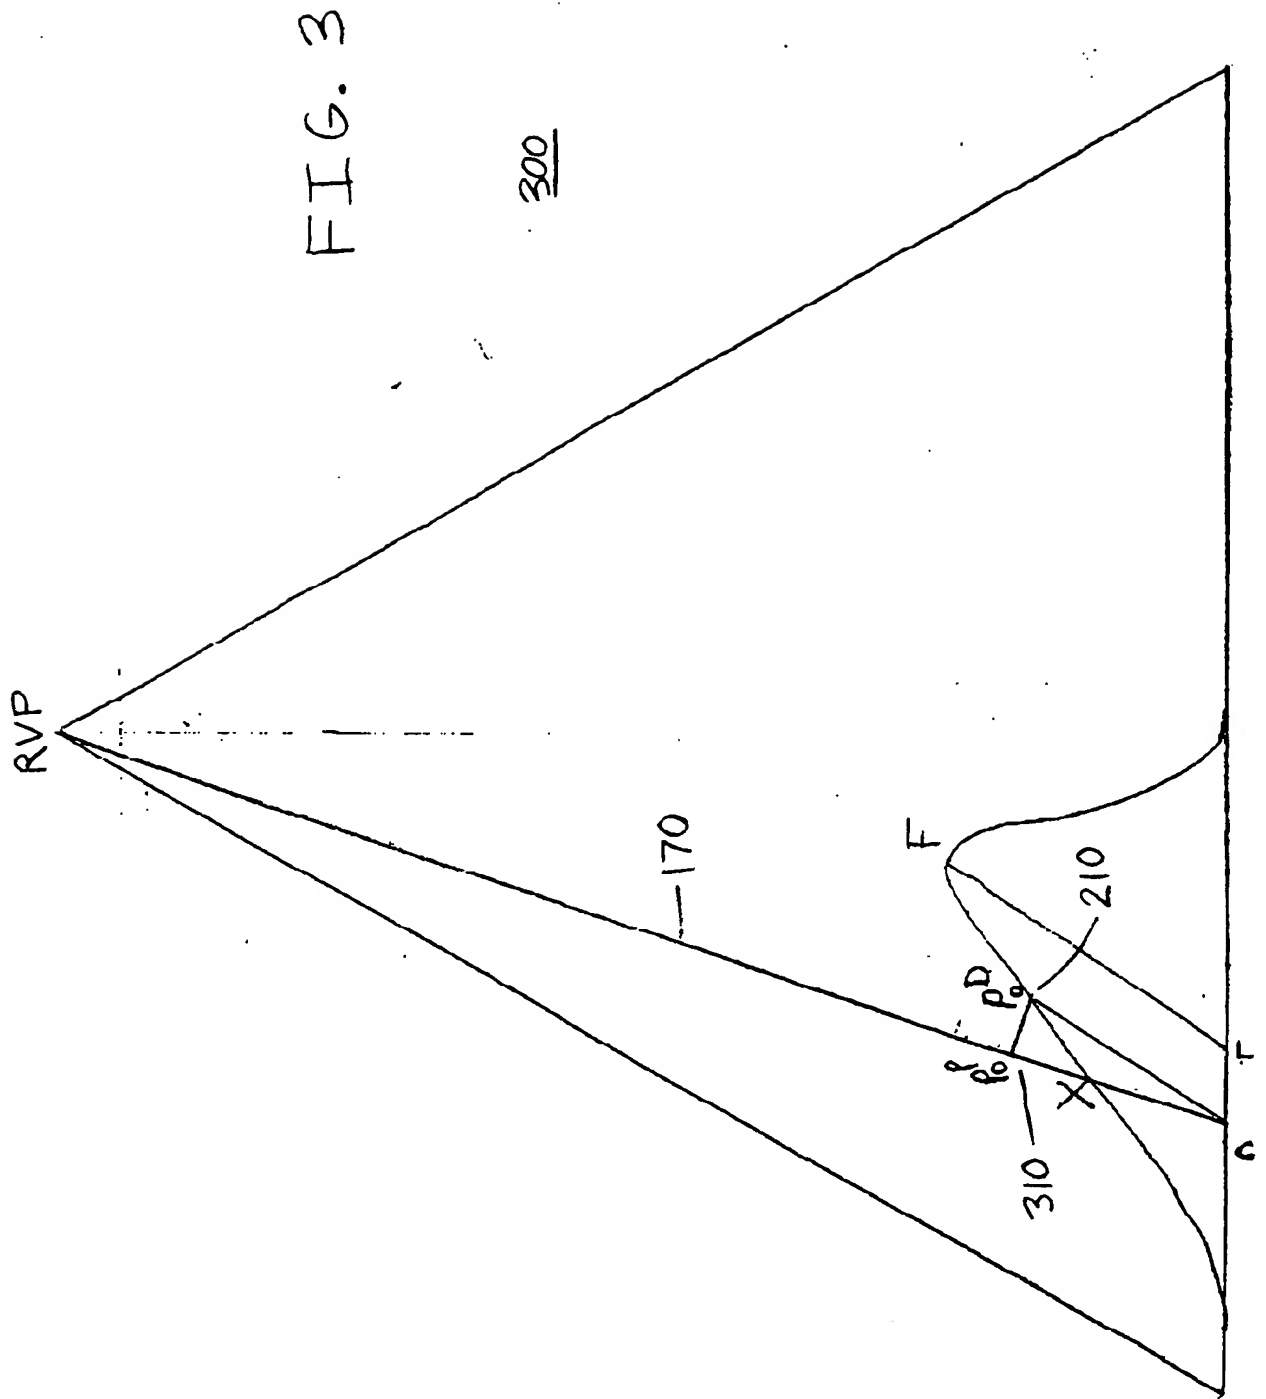

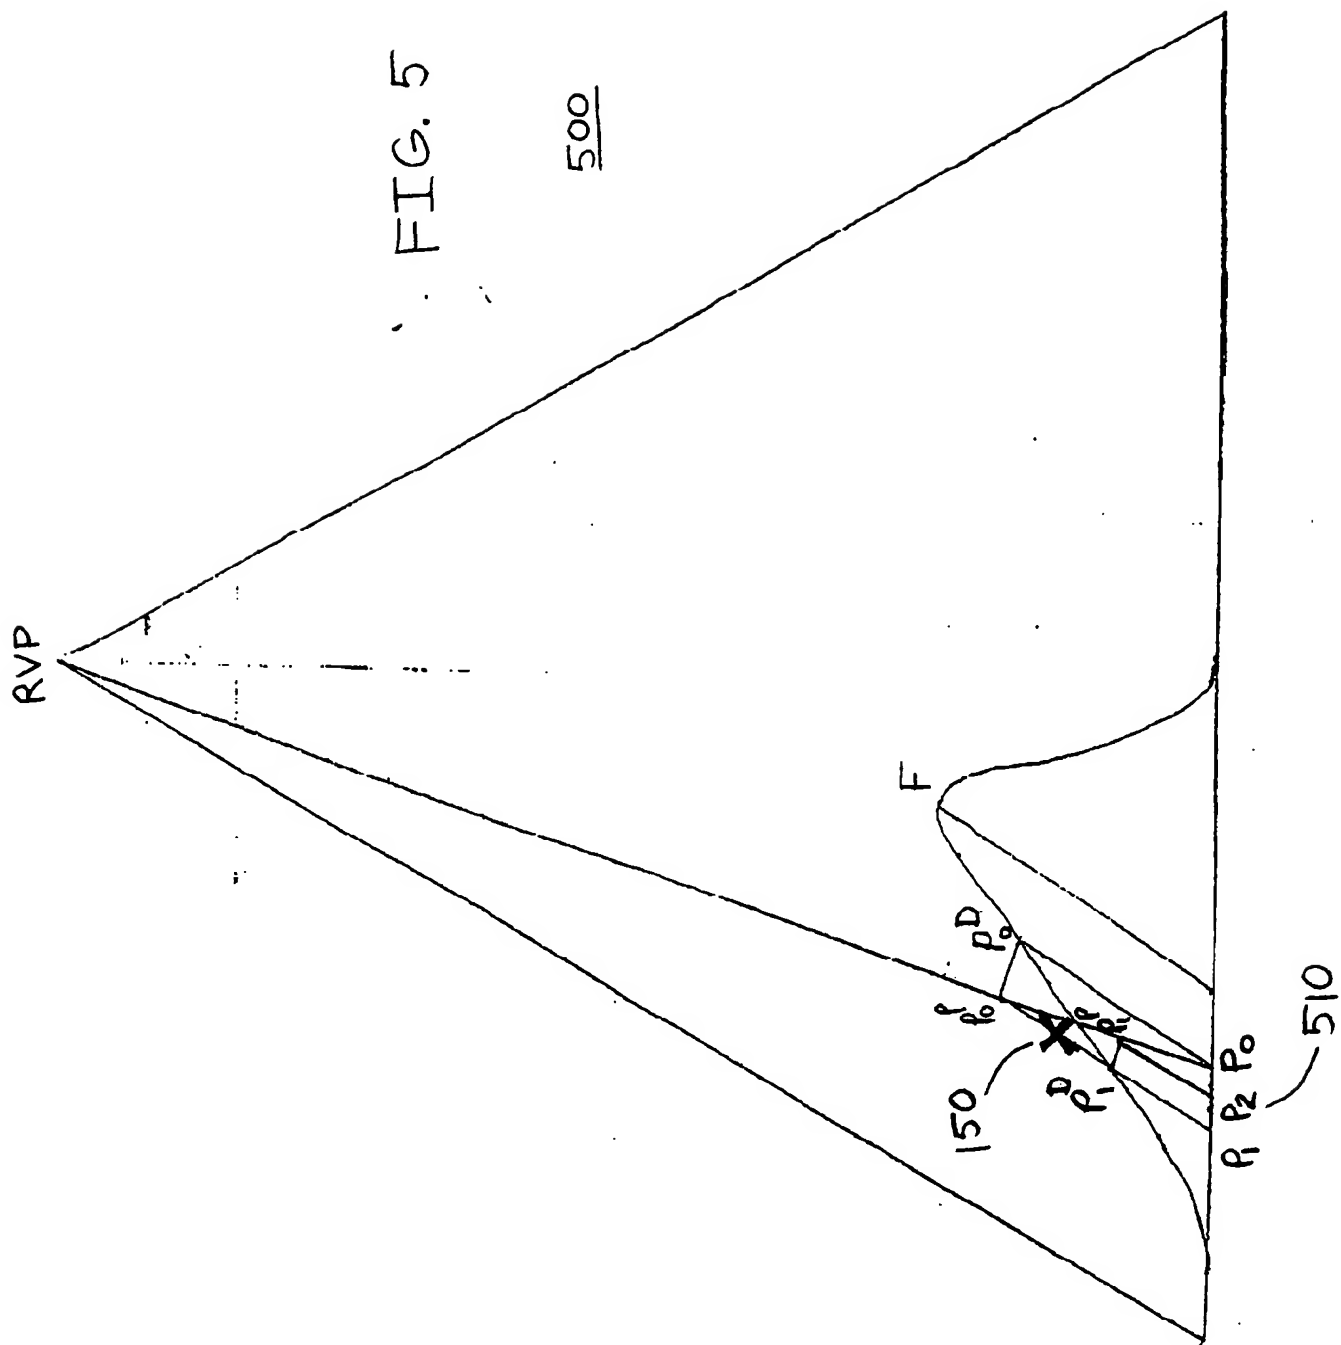

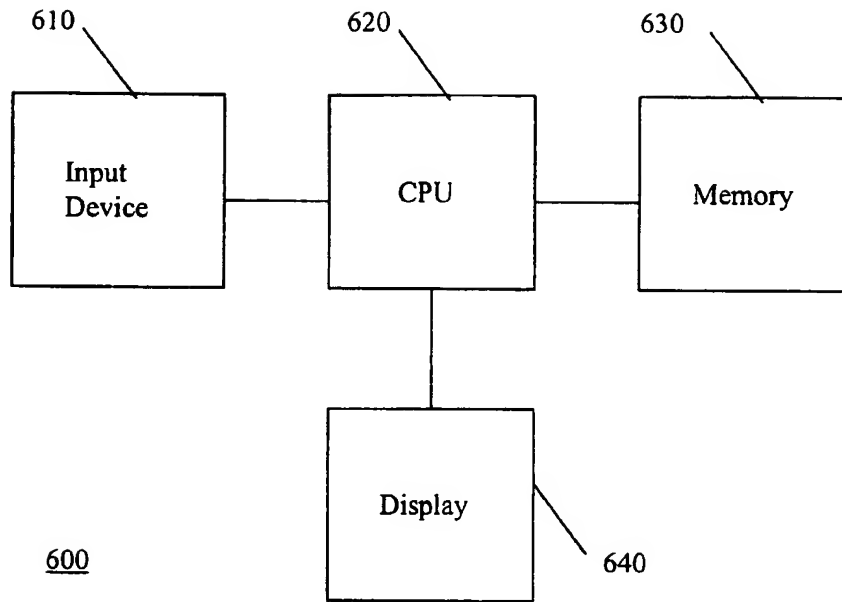


FIG. 6

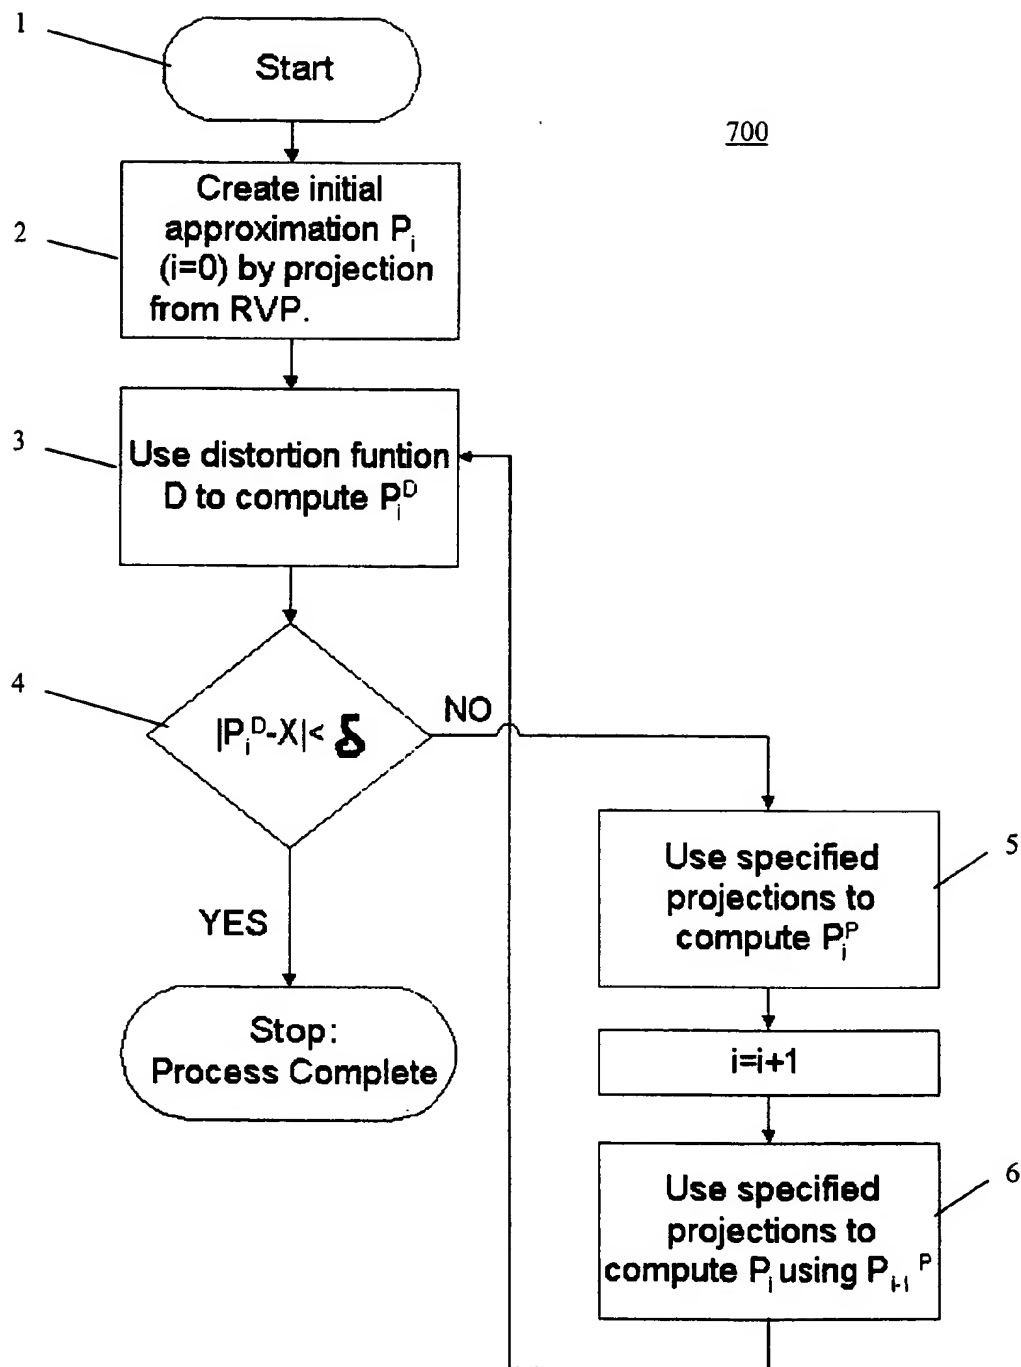


FIG. 7